



STANDARD

Test & Measuring Instruments

DIGITAL H.V. INSULATION TESTER



CE


FEATURES

- Microprocessor controlled with advanced safety features.
- Displays and sound warning if external voltage is present.
- Battery life extended by Enersave™ feature.
- Continuous battery monitoring.
- Auto-ranging/auto-off.
- Built-in carrying case, test leads in separate pouch.
- Real-time bargraph display of test voltage and voltage decay during discharge.
- Audible and visual message displayed if external voltage is present.
- Large LCD.

2804 IN

- Display can be customized for special orders.
- Show test time duration (up to 99.9s) for easy comparison.
- EEPROM calibration.
- EN61010-1 IEC 1010-1 CAT III


Test Leads Connections



SPECIFICATIONS

Test Voltage (DC V)	1KV	2.5KV	5KV	10KV
Measuring Ranges (Auto-Ranges)	0-50GΩ	0-125GΩ	0-250GΩ	0-500GΩ
Accuracy	0-50GΩ :±3% of reading 50-250GΩ :±5% of reading			
Dimensions	170(L)×120(W)×95(D)mm			
Weight (Battery Included)	1030g Approx.			
Power Source	1.5V (AA)×8 Batteries			
Accessories	Test leads Shoulder belt Instruction manual Batteries			

Test leads

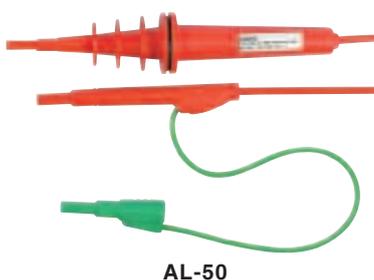

AL-50



AL-30



AL-30C



STANDARD ELECTRIC WORKS CO., LTD.

5F.,NO.105, Jhongcheng Rd., Tucheng Dist., New Taipei City 23674, Taiwan (R.O.C)

TEL: 886-2-22681528 FAX: 886-2-22681529

http://www.sew.com.tw e-mail: sales@sew.com.tw

<http://www.51082245.com/sew.htm>